

Accessories



Modul Auxiliary Contact Kontaktor Eaton ICON

Auxiliary contact module with
2 and 4 contacts, top or side mounting.

690 V AC (Ui)

**2 contacts,
4 contacts**

IEC/EN 60947

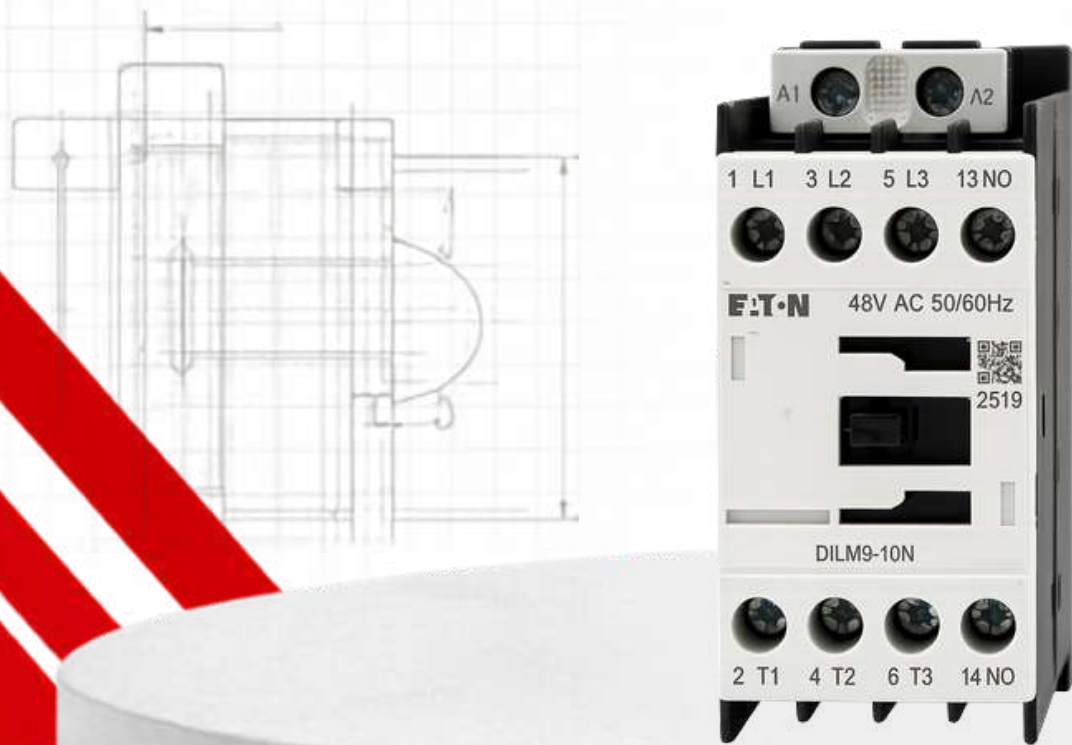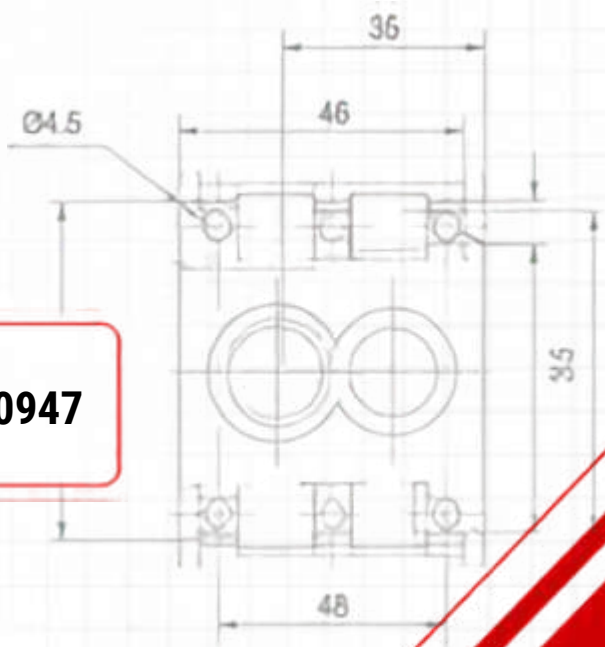

KODE PRODUK	KONTAK / RATING
DILAN-XHI11	2 contacts
DILM150N-XHI31	4 contacts
DILAN-XHI40	4 contacts
+16 varian lain tersedia	



Accessories

Aksesori MCCB Eaton Power Defense (PDC)


Auxiliary contact, undervoltage release,
handle, and extension shaft for PDC MCCB.



24 - 440 V AC
24 - 250 V DC



IEC/EN 60947-2

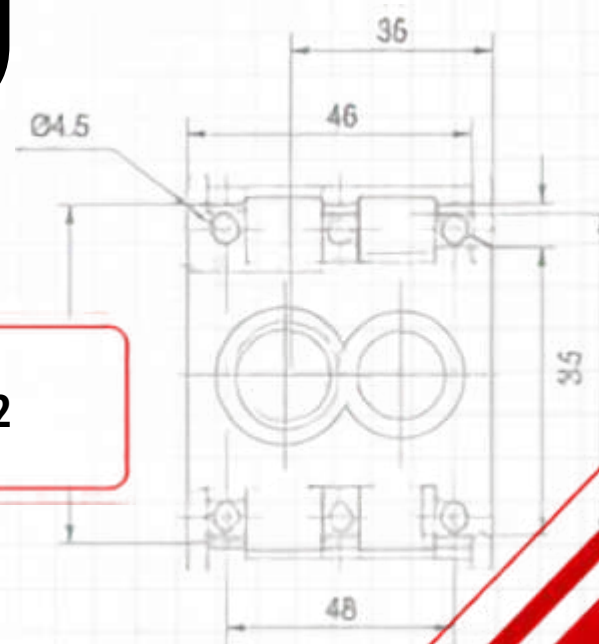**KODE PRODUK**

PDC1XUV125DCV

PDG2XHMCE

PDG2XHMDSP



+87 varian lain tersedia



Hubungi AMtelindo untuk konsultasi
teknis & ketersediaan varian

+62 851-2442-6930

Circuit Protection

Eaton New BZMM1 MCCB (frame M1, 10-160 A)

Compact MCCB 10-160 A with $I_{cs} = 100\% I_{cu}$.




415 V AC



3P



**IEC/EN
60947-2**

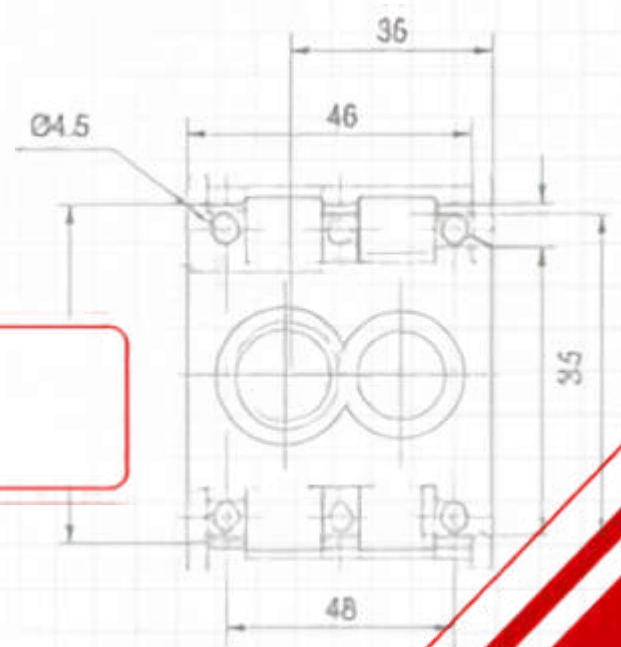

KODE PRODUK	KONTAK / RATING
BZMM1F3AX010	10 A
BZMM1F3AX063	63 A
BZMM1D3AX063	63 A



+23 varian lain tersedia



Hubungi AMtelindo untuk konsultasi teknis & ketersediaan varian

+62 851-2442-6930



Circuit Protection


Eaton New BZM2 MCCB (frame 2, 100-250 A)

MCCB 100-250 A, breaking capacity 15 to 50 kA.

 415 V AC

 3P

 IEC/EN 60947-2

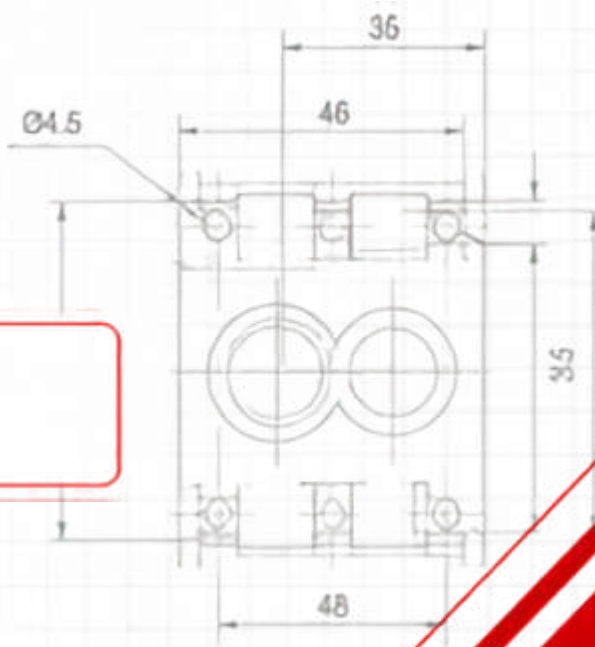

KODE PRODUK

KONTAK / RATING

BZM2B3AX180

180 A

BZM2B3AX160

160 A

BZM2N3AX225

225 A



+21 varian lain tersedia



Hubungi AMtelindo untuk konsultasi teknis & ketersediaan varian

+62 851-2442-6930

Circuit Protection


Eaton IZM6 Air Circuit Breaker (ACB)

Air circuit breaker 800-4000 A with Icu = Ics = Icw and an intelligent trip unit.

415 V AC (Ui
1,250 V AC; Uimp
12 kV)

3P, 4P

IEC/EN
60947-2

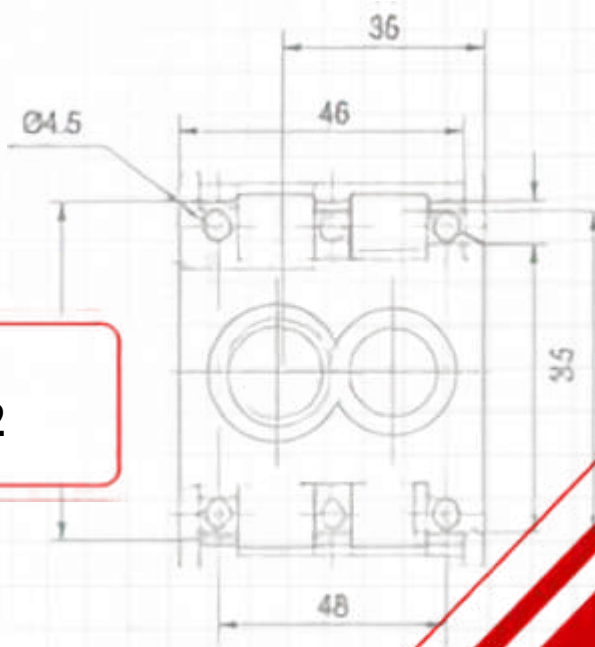

KODE PRODUK	KONTAK / RATING
IZM65B4C-D12FHM	1250 A
IZM65B3C-PG08FHM	800 A
IZM65N3C-D20FHM	2000 A
+125 varian lain tersedia	



Hubungi AMtelindo untuk konsultasi teknis & ketersediaan varian

+62 851-2442-6930

Circuit Protection



Eaton Power Defense PDC3 MCCB (frame 630 A)

Frame 630 A MCCB, 250-630 A,
breaking capacity 25 to 70 kA.

415 V AC
(max. 690 V
AC)

3P, 4P

IEC/EN
60947-2

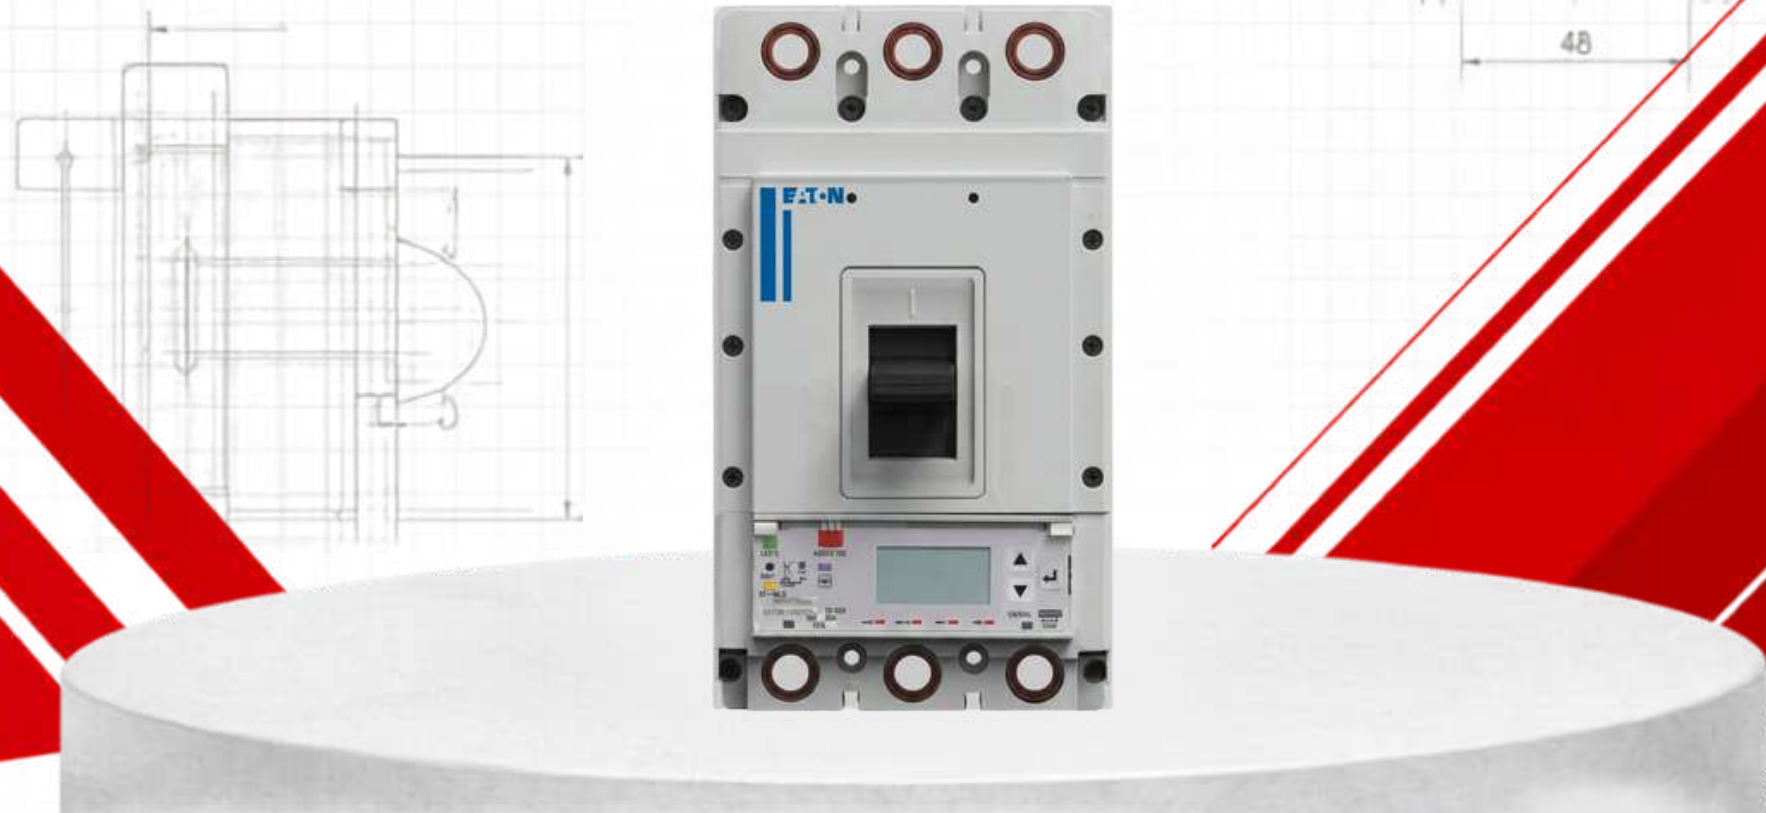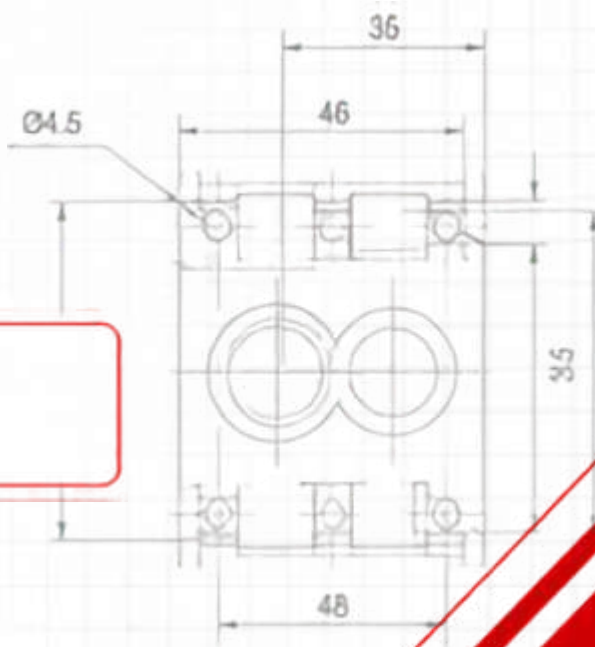

KODE PRODUK	KONTAK / RATING
PDC33G0630TAAS	630 A
PDC33F0250TAAS	250 A
PDC33F0630TAAS	630 A
+17 varian lain tersedia	



Circuit Protection



Eaton PL9X Miniature Circuit Breaker (MCB) 6 kA

MCB 6 kA, curves B, C, and D, 6-63 A, 1 to 4 pole.

**230/400 V
AC (Ui 500 V)**

**1P, 2P, 3P,
4P, 1P+N,
3P+N**

**IEC/EN
60898-1**

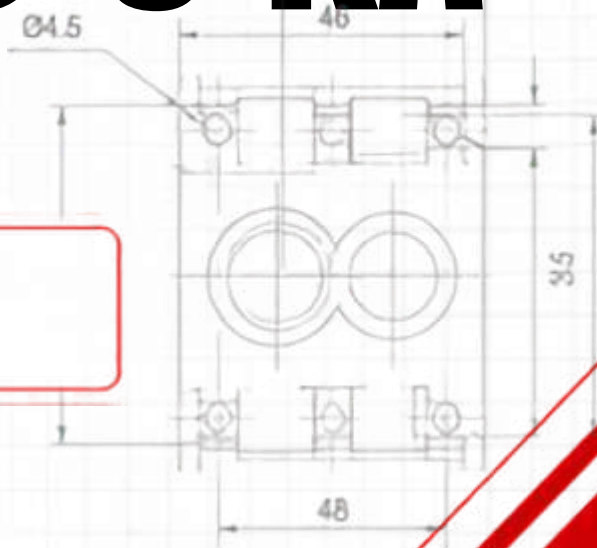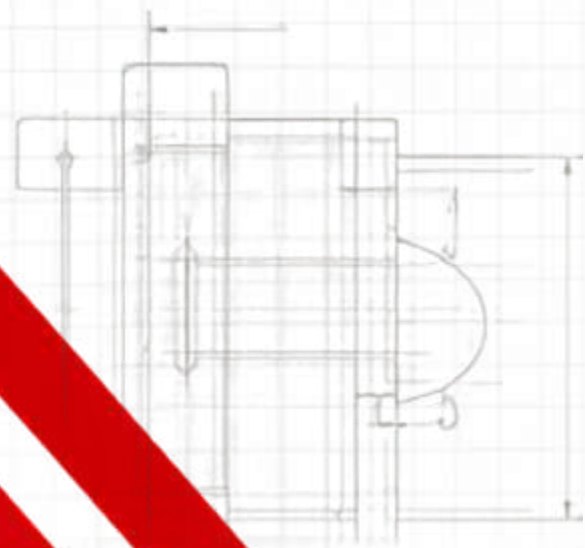

KODE PRODUK	KONTAK / RATING
PL9X-D20/3-C	20 A
PL9X-D32/4-C	32 A
PL9X-D63/3-C	63 A
+105 varian lain tersedia	



Hubungi AMtelindo untuk konsultasi teknis & ketersediaan varian

+62 851-2442-6930

Eaton Power Defense PDC1 MCCB (frame 160 A)

Technical drawing of a mechanical part, likely a bracket or support, showing dimensions and a red box.

Dimensions:

- Overall width: 36
- Distance between mounting holes: 46
- Overall height: 35
- Distance between mounting holes (bottom view): 48
- Mounting hole diameter: $\varnothing 4.5$

A red box highlights a specific area on the left side of the drawing, which appears to be a mounting flange or a specific feature of the part.



一、二、三



**IEC/EN
60947-2**



+62 851-2442-6930

Circuit Protection



Eaton New BZM3 MCCB (frame 3, 250-630 A)

MCCB 250-630 A, breaking capacity 25 to 50 kA.

415 V AC

3P

IEC/EN 60947-2

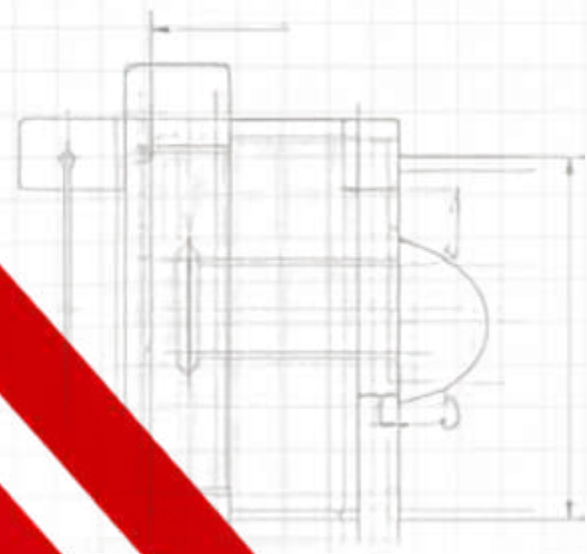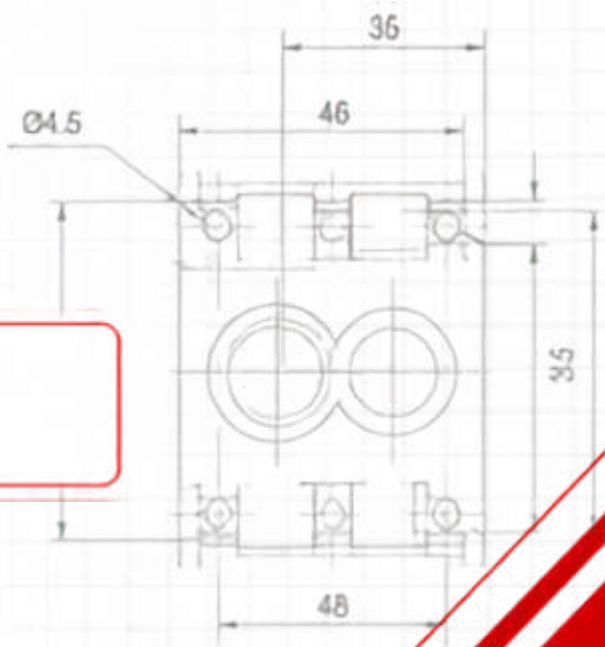

KODE PRODUK	KONTAK / RATING
BZM3C3AX630	630 A
BZM3B3AX500	500 A
BZM3N3AX315	315 A
+15 varian lain tersedia	



Hubungi AMtelindo untuk konsultasi teknis & ketersediaan varian

+62 851-2442-6930

Motor Control



Eaton ICON DILM Magnetic Contactor

Contactor 7-170 A for motors of 3 to 90 kW at 400 V.

400 V AC (AC-3), max. 690 V

3P

**IEC/EN 60947,
VDE 0660**

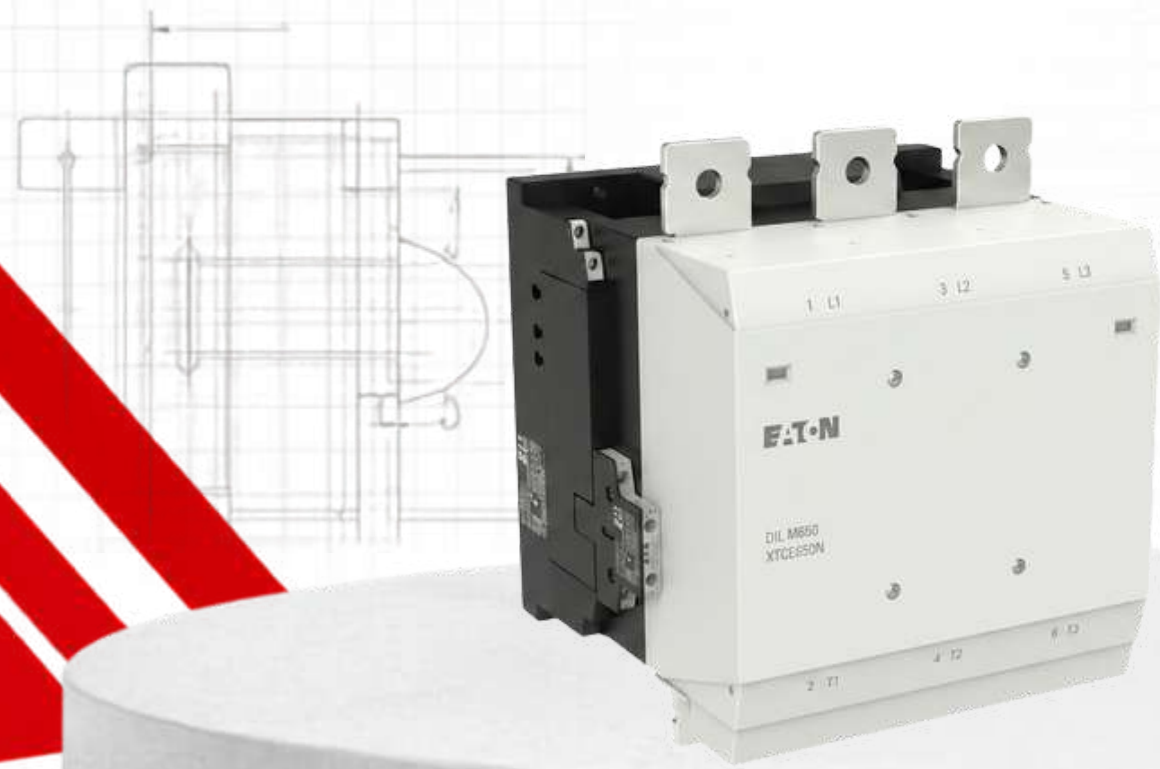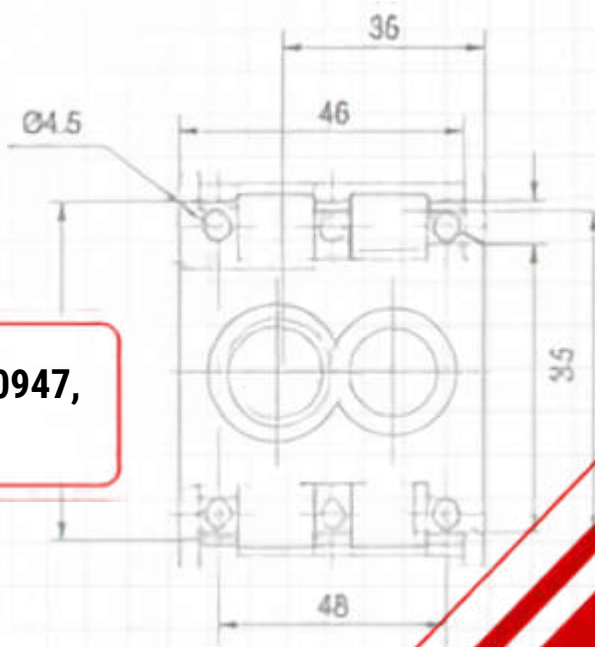

KODE PRODUK	KONTAK / RATING
DILM50-11N(230V50/60HZ)	50 A (AC-3, 380 V)
DILM12-10N(230V50/60HZ)	12 A (AC-3, 380 V)
DILM50-11N(DC24V)	50 A (AC-3, 380 V)

+31 varian lain tersedia



Hubungi AMtelindo untuk konsultasi teknis & ketersediaan varian

+62 851-2442-6930

Accessories

Aksesori MCCB Eaton New BZM


Shunt trip, UVT, auxiliary contact,
handle, and motor operator for BZM.



24 - 400 V AC /
24 - 220 V DC



IEC/EN 60947

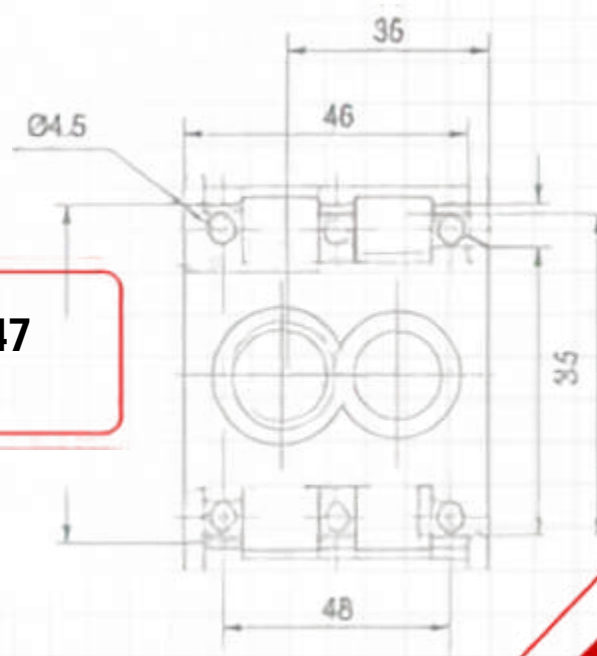**KODE PRODUK**

BZM3/DRH

BZM1/DRH

BZMM1/ZA L



+25 varian lain tersedia



Hubungi AMtelindo untuk konsultasi
teknis & ketersediaan varian

+62 851-2442-6930

Circuit Protection

Eaton Power Defense PDC2 MCCB (frame 250 A)

Frame 250 A MCCB, 125-250 A,
breaking capacity 25 to 70 kA.




415 V AC (max.
690 V AC)



3P, 4P



IEC/EN
60947-2

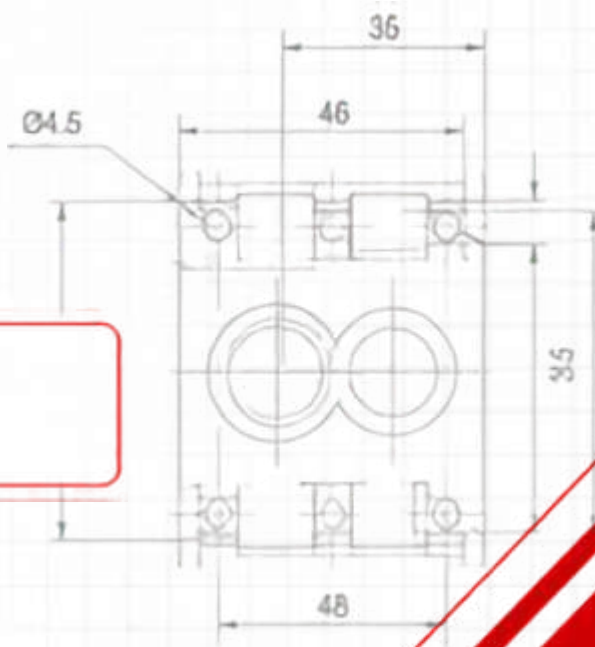

KODE PRODUK

KONTAK / RATING

PDC24N0125TAAS

125 A

PDC23N0160TAAS

160 A

PDC23G0160TAAS

160 A



+17 varian lain tersedia



Hubungi AMtelindo untuk konsultasi
teknis & ketersediaan varian

+62 851-2442-6930

Circuit Protection


Eaton New BZM1 MCCB (frame 1, 10-160 A)

MCCB 10-160 A with breaking capacity 36 kA and 50 kA.

415 V AC

3P

IEC/EN 60947-2

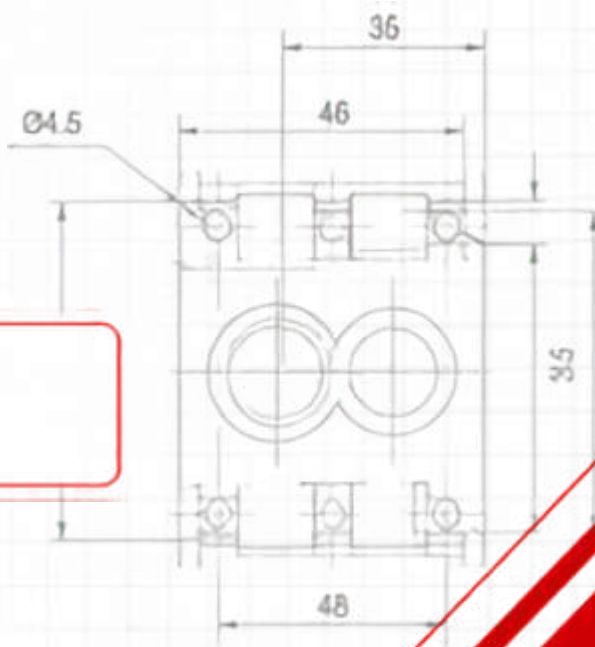

KODE PRODUK	KONTAK / RATING
BZM1C3AX010	10 A
BZM1C3AX040	40 A
BZM1N3AX063	63 A
+23 varian lain tersedia	



Hubungi AMtelindo untuk konsultasi teknis & ketersediaan varian

+62 851-2442-6930

Accessories

Aksesori Air Circuit Breaker Eaton IZM6


Motor operator, release, interlock, and
other accessories for IZM6 ACB.



24 - 240 V AC
/ DC



IEC/EN
60947-2

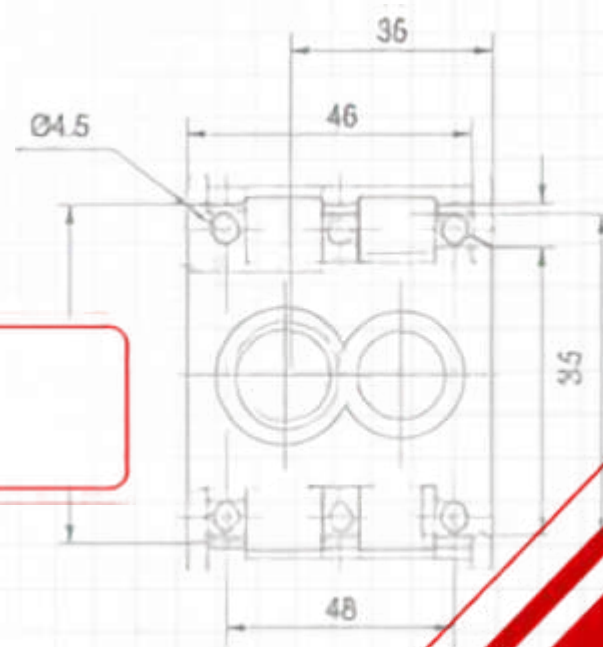**KODE PRODUK**

IZM6C-MIL31C-W

IZM6C-M-110AC/DC

IZM6C-MIL32C-W



+32 varian lain tersedia



Hubungi AMtelindo untuk konsultasi
teknis & ketersediaan varian

+62 851-2442-6930

Circuit Protection



Eaton PL10X Miniature Circuit Breaker (MCB) 10 kA

MCB 10 kA, curves B, C, and D, 6-63 A,
1 to 4 pole.

230/400 V
AC (Ui 500 V)

1P, 2P, 3P,
4P, 1P+N,
3P+N

IEC/EN
60898-1

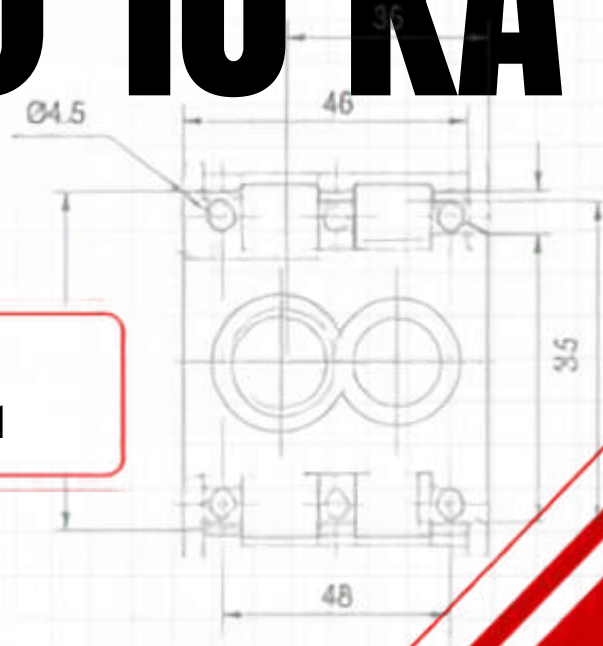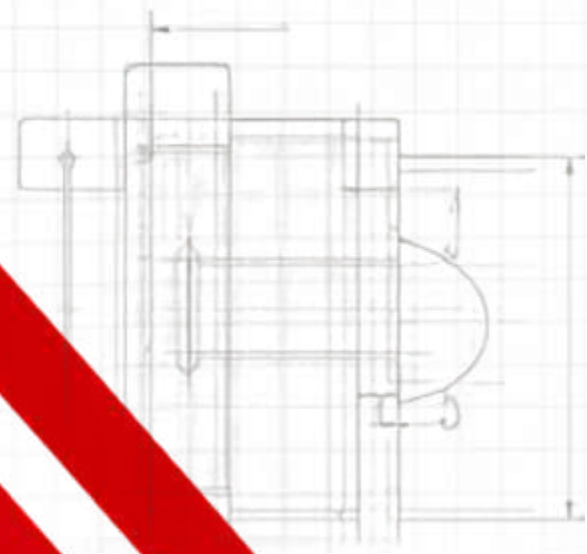

KODE PRODUK	KONTAK / RATING
PL10X-D32/2-C	32 A
PL10X-D50-C	50 A
PL10X-D25/4-C	25 A
+105 varian lain tersedia	



Hubungi AMtelindo untuk konsultasi
teknis & ketersediaan varian

+62 851-2442-6930

Motor Control


Eaton ICON ZB Thermal Overload Relay (TOR)

Overload relay with setting range 0.1 to 175 A.

690 V AC (Ui)

3P

IEC/EN 60947, VDE 0660

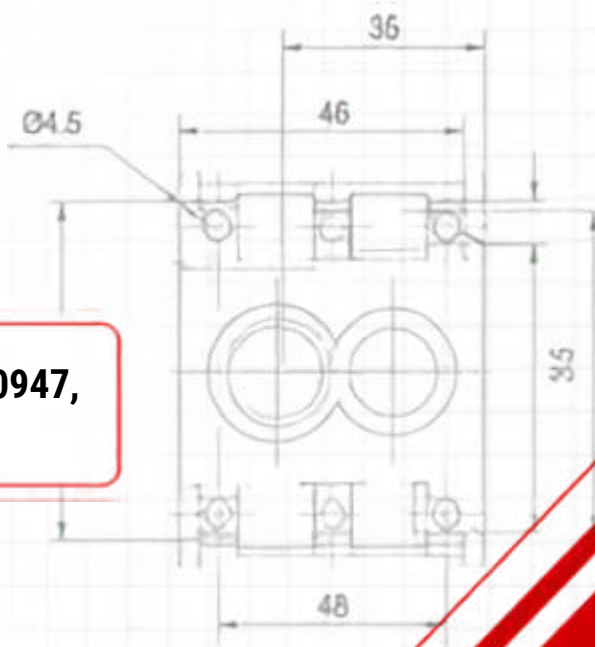

KODE PRODUK	KONTAK / RATING
ZB12N-1,6	1-1,6 A (adjustment range)
ZB12N-0,4	0,24-0,4 A (adjustment range)
ZB95N-80	63-80 A (adjustment range)
+39 varian lain tersedia	



Hubungi AMtelindo untuk konsultasi teknis & ketersediaan varian

+62 851-2442-6930

Power Distribution

Eaton MATSN Dual Source Automatic Transfer Switch (16-630 A)

Dual source automatic transfer switch 16-630 A with Type A/B/H controller options.




AC 220V (2P) /
400V (3P,4P),
50/60Hz



2P, 3P, 4P



GB 14048.1; GB/T
14048.11; IEC
60947-1; IEC 60947-
6-1

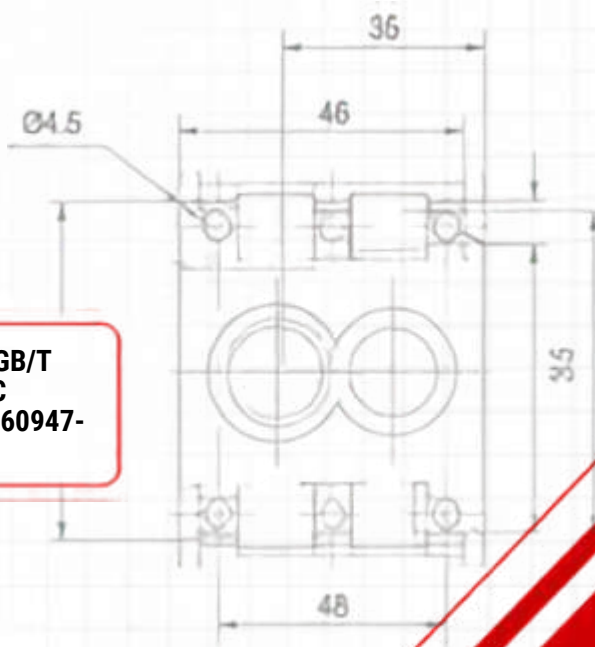

KODE PRODUK

KONTAK / RATING

MATSN-125/20/2B II -EN

20 A

ZB12N-0,4

63 A

ZB95N-80

400 A



+225 varian lain
tersedia



Hubungi AMtelindo untuk konsultasi
teknis & ketersediaan varian

+62 851-2442-6930

Eaton ATDH Bypass Isolation Automatic Transfer Switch (400-4000 A)

Bypass isolation automatic transfer switch 400-4000 A, withdrawable, for maintenance without load interruption.




AC 380V /
400V / 415V,
50/60Hz



3P, 4P, 3N



GB 14048.1; GB/T
14048.11; IEC
60947-1; IEC
60947-6-1

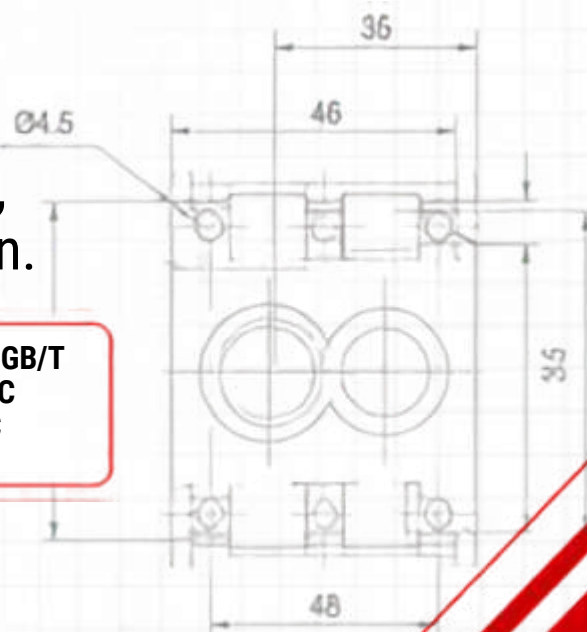

KODE PRODUK

KONTAK / RATING

ATDH8D2-400/4HWA-EN

400 A

ATDH8D2-500/3HWA-EN

500 A

ATDH8D2-1000/4HWPB-EN

1000 A



+52 varian lain tersedia



Hubungi AMtelindo untuk konsultasi
teknis & ketersediaan varian

+62 851-2442-6930

Eaton ATDH Automatic Transfer Switch (100-4000 A)

Automatic transfer switch 100-4000 A, Class PC dedicated, with in-phase or parallel transfer controller.



AC 380V /
400V / 415V,
50/60Hz



3P, 4P, 3N



GB 14048.1;
GB/T 14048.11;
IEC 60947-1; IEC
60947-6-1



KODE PRODUK	KONTAK / RATING
ATDH8C2-250/4BFA-EN	250 A
ATDH8C2-2000/4HFB-EN	2000 A
ATDH8C2-200/3BFA-EN	200 A



+84 varian lain tersedia



Hubungi AMtelindo untuk konsultasi
teknis & ketersediaan varian

+62 851-2442-6930

Metering & Power
Quality

Eaton PXM350 Power Xpert Energy Meter (Compact)

Compact DIN rail three-phase energy
meter with revenue-grade accuracy.



10 - 690 Vac
(direct input)



IEC 62053-22;
ANSI C12.20; IEC
61557-12



KODE PRODUK

PXM350MA6321

PXM350MA6341

PXM350MA6521



+3 varian lain tersedia



Hubungi AMtelindo untuk konsultasi
teknis & ketersediaan varian

+62 851-2442-6930

Metering & Power
Quality

Eaton PXQ Power Xpert Quality Event Analysis System

Power quality event analysis system
with ANSI C12.20 Class 0.1 accuracy.



24 - 48 Vdc (device power
supply); metering voltage 30-
700 Vac rms L-G, 1200 Vac
rms L-L



IEC 62053-22; ANSI C12.20; IEC
61000-4-30 Class A; IEC 62586;
IEC 61557-12; IEC/EN 61010-1;
UL 61010-1



KODE PRODUK

PXQ-ST1-1A1

PXQ-ST2-1A1

PXDB-HMI-07



+6 varian lain tersedia



Hubungi AMtelindo untuk konsultasi
teknis & ketersediaan varian

+62 851-2442-6930

Metering & Power
Quality

Eaton PXBCM Power Xpert Branch Circuit Monitor


Ethernet-based branch circuit monitor
scalable up to 100 circuits per system.



Sesuai voltage panelboard
(mengikuti sistem distribusi
terpasang)



UL 61010-1; CAN/C22.2; CE
mark; EMC EN61326; IEC
61000-4-X level 3

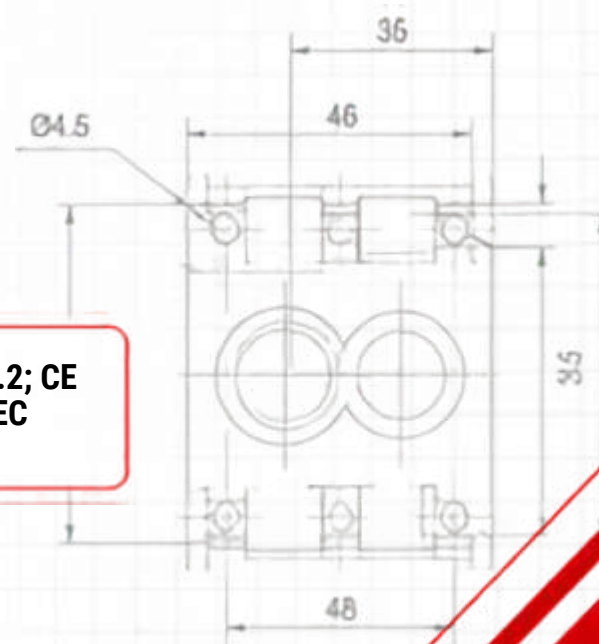

KODE PRODUK

PXBCM-MB-BASIC

PXBCM-MB-ENERGY

PXBCM-MMS-L09-A



+22 varian lain tersedia



Hubungi AMtelindo untuk konsultasi
teknis & ketersediaan varian

+62 851-2442-6930

Metering & Power
Quality

Eaton PXMP Power Xpert Multi-Point Meter


Modular multi-point submetering
device for up to 60 circuits.



120 - 600 Vac



ANSI C12.20; IEC/EN61010-1;
UL 61010-1 File E185559;
CAN/C22.2 No 1010.1.92; CE
Mark; EMC EN61326

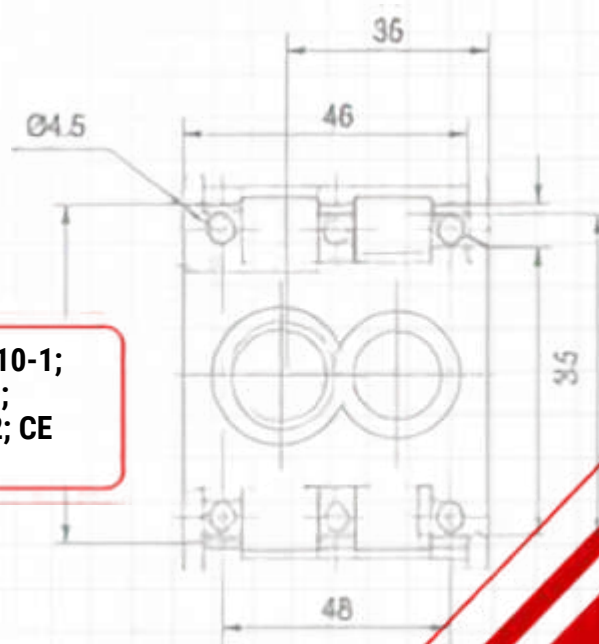

KODE PRODUK

PXMP-MB

PXMP-MB-AB

PXMP-MM100MA



+23 varian lain tersedia



Hubungi AMtelindo untuk konsultasi
teknis & ketersediaan varian

+62 851-2442-6930

Metering & Power
Quality

Eaton Current Transformer (CT) Low Voltage untuk Metering

Solid core and split core current transformers for ANSI metering accuracy.



Low voltage, up to
600 V



ANSI B0.1; ANSI C57.13
(untuk sebagian desain
solid core)



KODE PRODUK

S060-500

S060-101

S060-151



+88 varian lain tersedia



Hubungi AMtelindo untuk konsultasi
teknis & ketersediaan varian

+62 851-2442-6930